



NOW AVAILABLE NSF-CERTIFIED

AVAILABLE MOUNTING CONFIGURATIONS

3WHA-CC CLOSE COUPLED
3WHA-VM VERTICAL CLOSE-COUPLED

OPERATING LEVELS

MIN FLOW	80 GPM	18 m ³ /h
MAX FLOW	820 GPM	186 m ³ /h
DISCHARGE SIZE	3"	76 mm
SUCTION SIZE	4"	101 mm
SOLIDS HANDLING	.50"	13 mm
MAX SPEED	3525 RPM	3525 RPM
SHUT-OFF HEAD	232'	71 m
BEP HEAD	190'	58 m
BEP FLOW	635 GPM	144 m ³ /h
BEP PERCENT	83%	83%



A typical picture of the pump is shown. Please contact Cornell Pump Company for further details. All information is approximate and for general guidance only.

PARTS	CAST IRON BRONZE FITTED	ALL IRON (OPTIONAL)	NSF-CERTIFIED
WEAR RING	BRONZE SAE 660	CAST IRON ASTM A48 CL30	ASTM B271 C95800 OR ASTM B505 C95800
IMPELLER	CAST IRON ASTM A48 CL30	CAST IRON ASTM A48 CL30	ASTM B148 C95800
VOLUTE	CAST IRON ASTM A48 CL30	CAST IRON ASTM A48 CL30	ASTM A48 CL 30 GRAY IRON
SHAFT	CARBON STEEL	CARBON STEEL	CARBON STEEL
SHAFT SLEEVE	BRONZE SAE 660	303 STAINLESS STEEL	303 STAINLESS STEEL
BACKPLATE	CAST IRON ASTM A48 CL30	CAST IRON ASTM A48 CL30	ASTM A48 CL 30 GRAY IRON
PACKING (STANDARD)	GRAPHITED ACRYLIC	GRAPHITED ACRYLIC	(NOT AVAILABLE)
MECHANICAL SEAL	T-1, BUNA, CARBON/CERAMIC	T-1, BUNA, CARBON/CERAMIC	T-1, BUNA, CARBON/CERAMIC
MOTOR	OPEN DRIPPROOF - STD, TEFC & OTHERS - OPTIONAL	OPEN DRIPPROOF - STD, TEFC & OTHERS - OPTIONAL	OPEN DRIPPROOF - STD, TEFC & OTHERS - OPTIONAL

The 3WHA general purpose pump is designed with Cornell's renowned quality and durability. It features a 3" discharge and a 4" suction, enclosed multi-vane impeller, and flanged tangential single volute. Optional motors include TEFC and others.

- Standard cast iron bronze fitted construction (CI impeller)
- External hydraulic balance line
- Back pullout design
- Replaceable suction wear ring
- Replaceable shaft sleeve
- "Shower curtain shield" bearing protection
- Industry-leading efficiencies
- Two-year warranty
- RunDry™ option (intermittent run dry capability)
- Optional Cycloseal® with type 1 mechanical seal



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL & GAS



REFRIGERATION



RENTAL

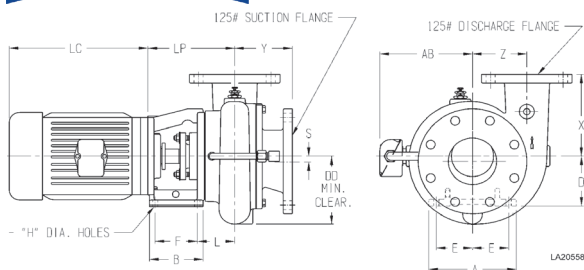


Fig 1

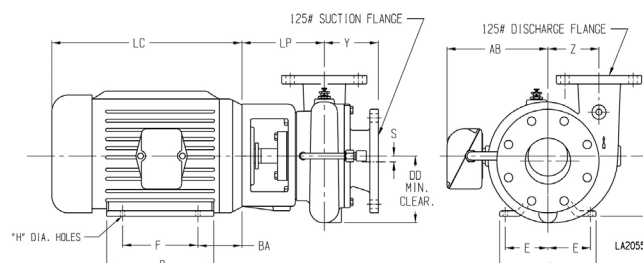


Fig 2

PUMP DIMENSIONS

MODEL	CONNECTION		DISCH. INCR.	AK DIM.	FIG.	DD	L	S	X	Y	Z	LP
	DISCH.	SUCT.										
3WH/A	3	4	90°	4.5	1	7.12	3.09	-	6	4.76	4.5	7.19
				8.5	2	7.12	-	-	6	4.76	4.5	8
				12.5	2	7.12	-	-	6	4.76	4.5	8

MOTOR DIMENSIONS

MOTOR FRAME	AK DIM.	A	B	D	E	F	H	AB	BA	LC
213-5	8.5	9.5	8	5.25	4.25	7	0.41	7.94	4.5	13.69
254-6	8.5	11.25	11.25	6.25	5	10	0.53	9.5	5	17.94
284-6	12.5	12.25	12.25	7	5.5	11	0.53	11.37	5	21.31

Performances shown are for S.G. 1.0
60°F water, close-coupled configuration.
Other mounting styles or S.G.
may require curve adjustments.

Speed	Impeller Dia.	Style	Volute	Solids Dia.	N _s	Suction	Discharge	No. Vanes
3525 RPM	VARIOUS	ENCLOSED	SINGLE	.50"	1725	4"	3"	6

